


Product Components

- ① 4500 Electric Strike Body
- ② Keeper Shims & Screws (#4-40 x 1/8" and #4-40 x 3/16")
- ③ Centerlined and Non Handed Faceplate for Cylindrical Locksets
- ④ Offset and Non Handed Faceplate for Mortise Locksets
- ⑤ #12-24 x 1/2" Mounting Screws
- ⑥ 12 & 24 Volt Plug In Connectors
- ⑦ Trim Enhancer & Screws

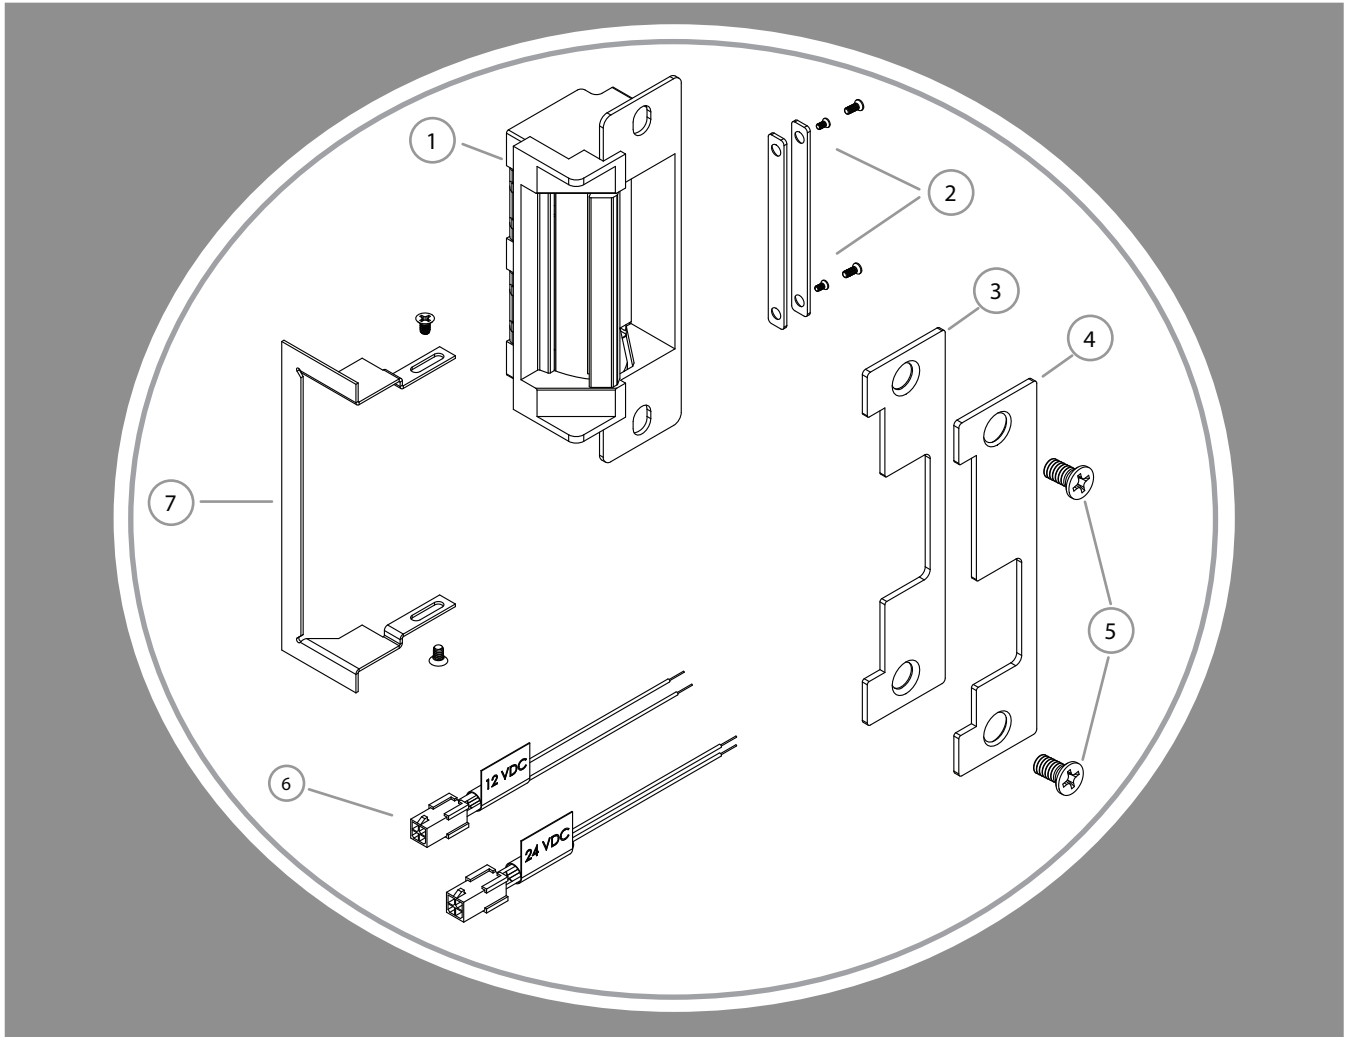

Electrical Specifications

ELECTRICAL RATINGS FOR SOLENOID	CONTINUOUS DUTY		INTERMITTENT DUTY*	
	12VDC	24VDC	12-16VAC	24VAC
Resistance in Ohms	50	200	50	200
Amps	.24	.12	.24-.32	.12
Solenoids are rated at +/- 10% indicated value. *10% max duty cycle (2 min. max on time)				

MINIMUM WIRE GAUGE REQUIREMENTS	SOLENOID VOLTAGE	
	12VDC	24VDC
200 feet or less	18 gauge	20 gauge
200 - 300 feet	16 gauge	18 gauge
300 - 400 feet	14 gauge	16 gauge