D2-PKG-1799(a) 9/07

1000 SERIES LOCKOUT MODELS
FOR MODELS: 1011, 1021, 1031, 1041 WITH 1/2" (13 mm) LATCH

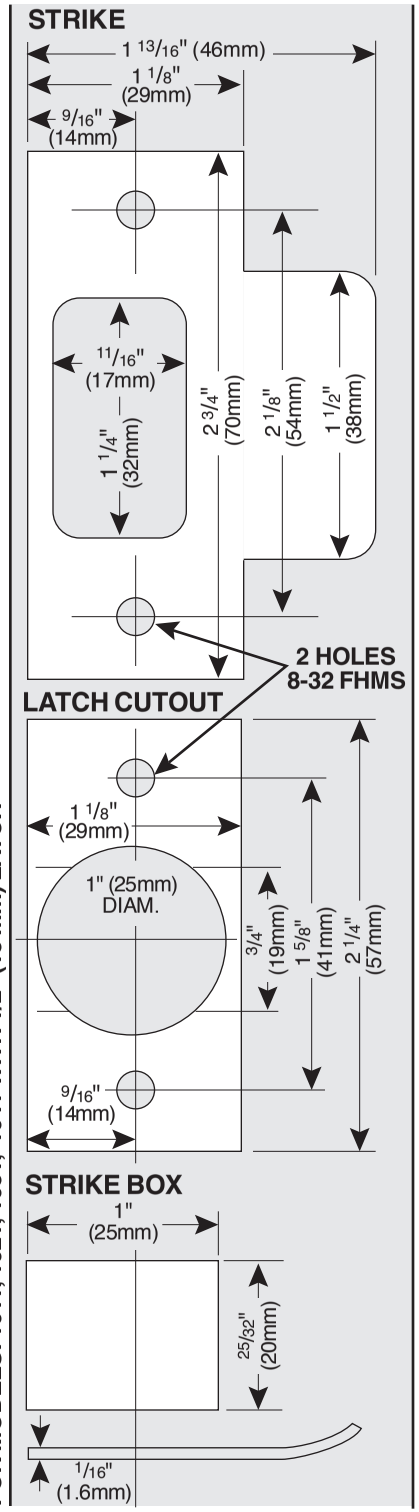

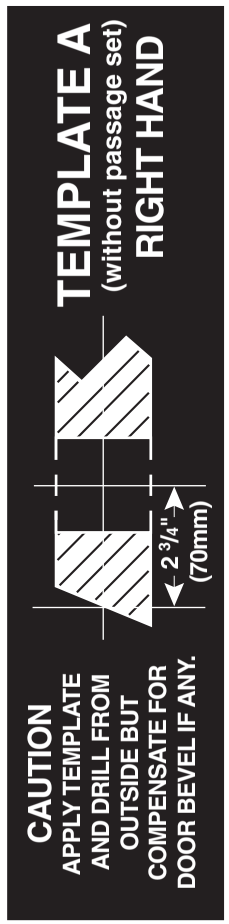

THIS FLAP FOLDS OVER THE EDGE OF THE DOOR

BE SURE THE FOLD IS EXACTLY ON THE LINE

MARK CENTER OF DOOR THICKNESS

2 1/4" (57mm)
1 3/4" (44mm)
1 3/8" (35mm)
1 1/2" (38mm)
2" (51mm)

BORE
1" (25mm) DIAM.
LATCH HOLE

CAUTION : MARK ACCURATELY - BORE STRAIGHT

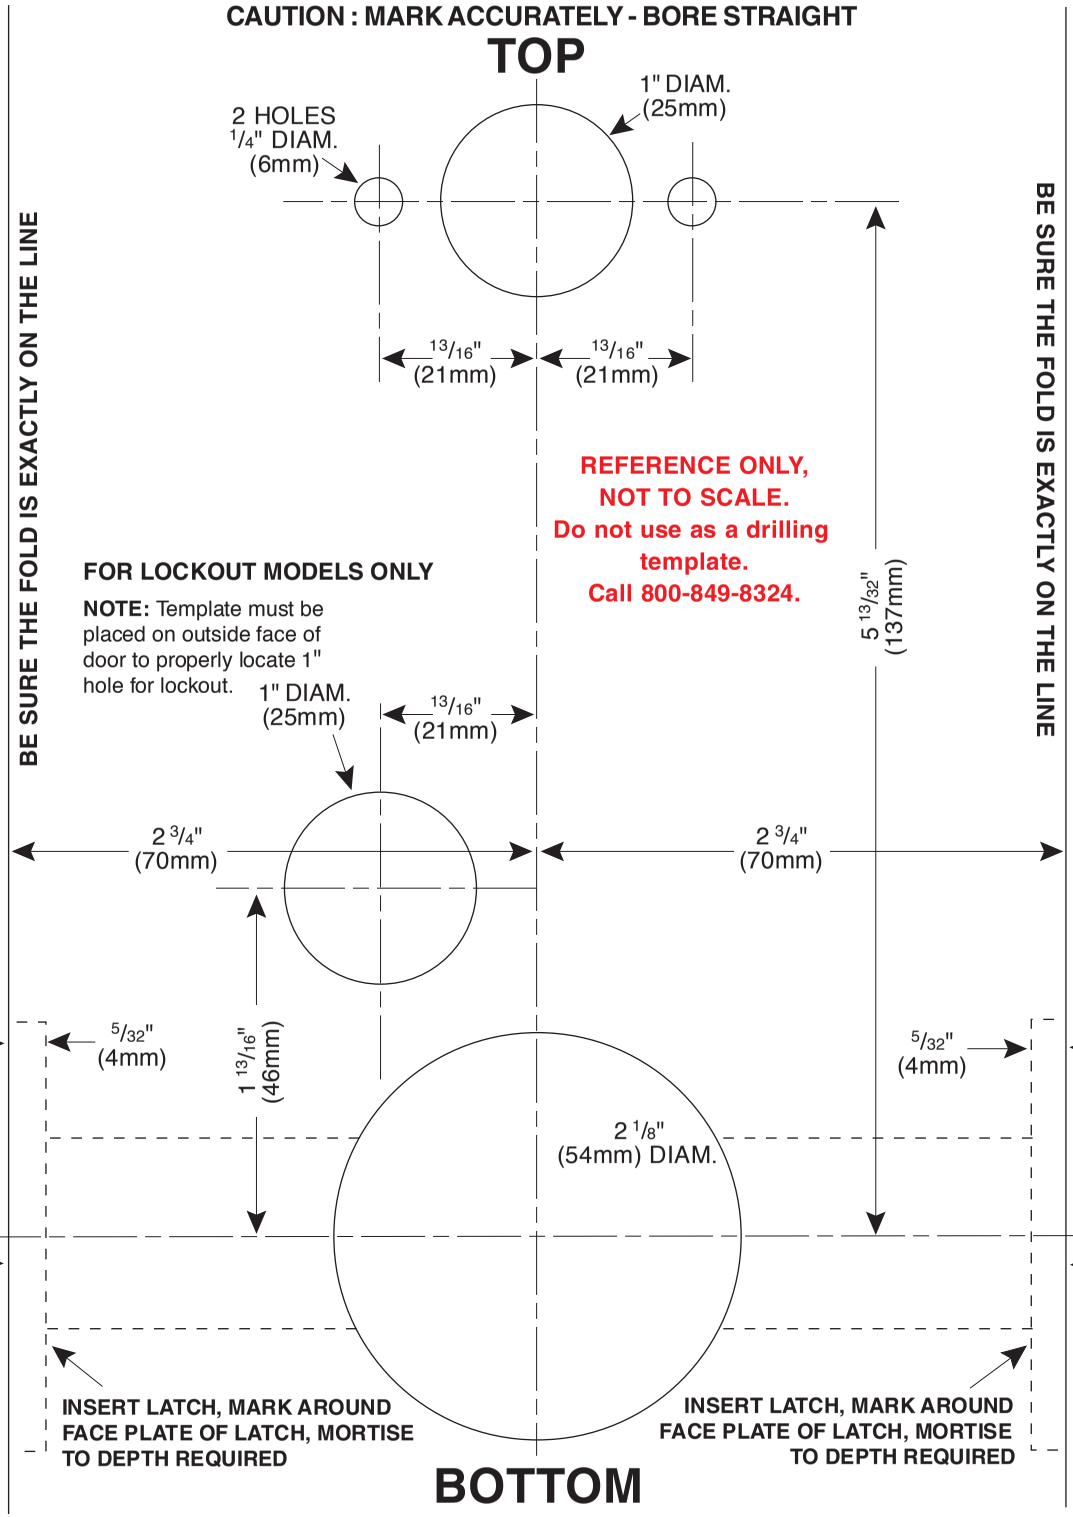

THIS FLAP FOLDS OVER THE EDGE OF THE DOOR

BE SURE THE FOLD IS EXACTLY ON THE LINE

TEMPLATE A
(without passage set)
LEFT HAND

NOTE: Lock will accomodate doors 1 3/8" (35mm) to 2 1/4" (57mm) thick. Suitable reinforcement shall be provided by the hollow metal door manufacturer to prevent collapsing of door. When door silencers are to be installed, proper allowances must be made for strike location.

MARK CENTER OF DOOR THICKNESS

2 1/4" (57mm)
1 3/4" (44mm)
1 3/8" (35mm)
1 1/2" (38mm)
2" (51mm)

BORE
1" (25mm) DIAM.
LATCH HOLE