

KROME

Door Lock Collection

Table of Contents

11 Series		
Heavy Duty Cylindrical Lever Lock	-----	02, 03
Heavy Duty Cylindrical Knob Lock	-----	04, 05
22 Series		
Medium Duty Cylindrical Lever Lock	-----	06, 07
Medium-Duty Cylindrical Knob Lock	-----	08, 09
25 Series		
Deadbolt Lock	-----	10, 11
RDL Series		
Replacement Deadlatch	-----	12
RSL Series		
Replacement Spring Latch	-----	13

11 SERIES

HEAVY-DUTY CYLINDRICAL LEVER LOCK

11 Lever Lockset, Grade 1



Individual coil compression springs to provide great strength and durability

Meet ANSI hollow metal and wooden door cutout 1-5/8" (40MM) ~2"(52mm) door thickness

Removable True through-bolting (Convertible thru-bolt) for wooden and steel door

Wrought brass or bronze rose The Anti-sagging mechanism of handle in rose

Pressure cast Solid Zinc Handle Universal, non-handed

Universal Turn Button or Push In & Turn Button

Stainless Steel 17/32" (13.5mm) throw deadlatch & spring latch Reversible latch for flat & beveled door

UL Label UL 3 Hour fire rated

Precision solid brass pin tumbler cylinders cap-nut way with brass keys Schlage "C" Keyway & SFIC available

How to Order

KROM-11-L-F-10-C26D

Finish

Function


Rose Design

Lever Design

Model

Krome Line

Door Preparation



SFIC


Small Format Interchangeable Core available

11 SERIES

HEAVY-DUTY CYLINDRICAL LEVER LOCK


Lever Design:

L Lever

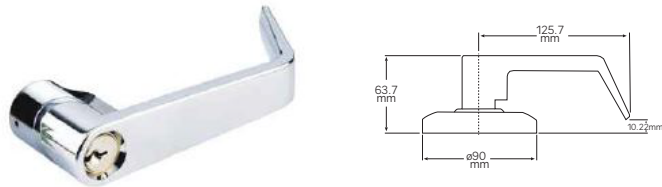

Rose Design:

Flat Rose (F)



Functions:

- 10 - Passage
- 40 - Privacy
- 53 - Entry
- 70 - Classroom
- 72 - Classroom (Double)
- 80 - Storeroom
- 82 - Storeroom (Double)

Finish:

C26D

Advantages

Certifications

- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 1,000,000 cycles requirements
- **UL/cUL:** all locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
- **Positive pressure:** Meets UL10C
- **ADA compliant:** Designed to meet the American with Disabilities Act. requirement for barrier free accessibility

Flexibility

- Removable convertible post
- Free wheeling mechanism
- Various lever designs available
- Large selection of functions and finishes available

Free wheeling mechanism (clutch)

When the outside lever is locked, it will rotate freely up and down while remaining securely locked.



Specifications

Door Thickness

1-5/8" (40mm) to 2" (52mm)

Backset

2-3/4" (70mm) standard, 2-3/8" (60mm) optional

Latch Front

1-1/8" (29mm) x 2-1/4" (57mm)

Latch Bolt

Stainless Steel 17/32" (13.5mm) throw

Strike

ANSI (ASA) curved lip strike standard.

Cylinder & Keys

Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway and SFIC available.

Warranty

Ten-year Limited Mechanical Warranty

11 SERIES

HEAVY-DUTY CYLINDRICAL KNOB LOCK

11 Knob Lockset, Grade 1



How to Order

KROM-11-B-F-10-C26D

Finish

Function


Rose Design

Knob Design

Model

Krome Line

Door Preparation

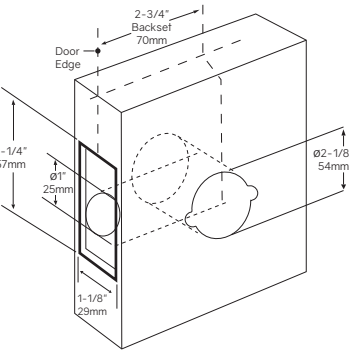


SFIC

Small Format Interchangeable Core available


11 SERIES

HEAVY-DUTY CYLINDRICAL KNOB LOCK

Knob Design:
B Knob

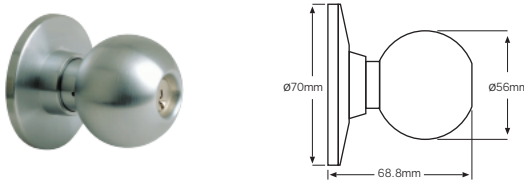

Rose Design:
F Rose (Flat)



- Functions:
- 10 - Passage
 - 40 - Privacy
 - 53 - Entry
 - 70 - Classroom
 - 72 - Classroom (Double)
 - 80 - Storeroom
 - 82 - Storeroom (Double)

Finish:
C26D

Advantages

- Certifications**
- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 1,000,000 cycles requirements
 - **UL/cUL:** All locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
 - **Positive pressure:** Meets UL10C

- Flexibility**
- Large selection of functions and finishes
 - Easy to adjust the door thickness range by indicator

Specifications

Door Thickness
1-3/8" (35mm) to 2" (52mm)

Backset
2-3/4" (70mm) standard, 2-3/8" (60mm) optional

Latch Front
1-1/8" (29mm) x 2-1/4" (57mm)

Latch Bolt
Stainless Steel 17/32" (13.5mm) throw

Strike
ANSI (ASA) curved lip strike standard.


Cylinder & Keys
Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, and SFIC available.

Warranty
Ten-year Limited Mechanical Warranty

22 SERIES

MEDIUM-DUTY CYLINDRICAL LEVER LOCK

22 Lever Lockset, Grade 2

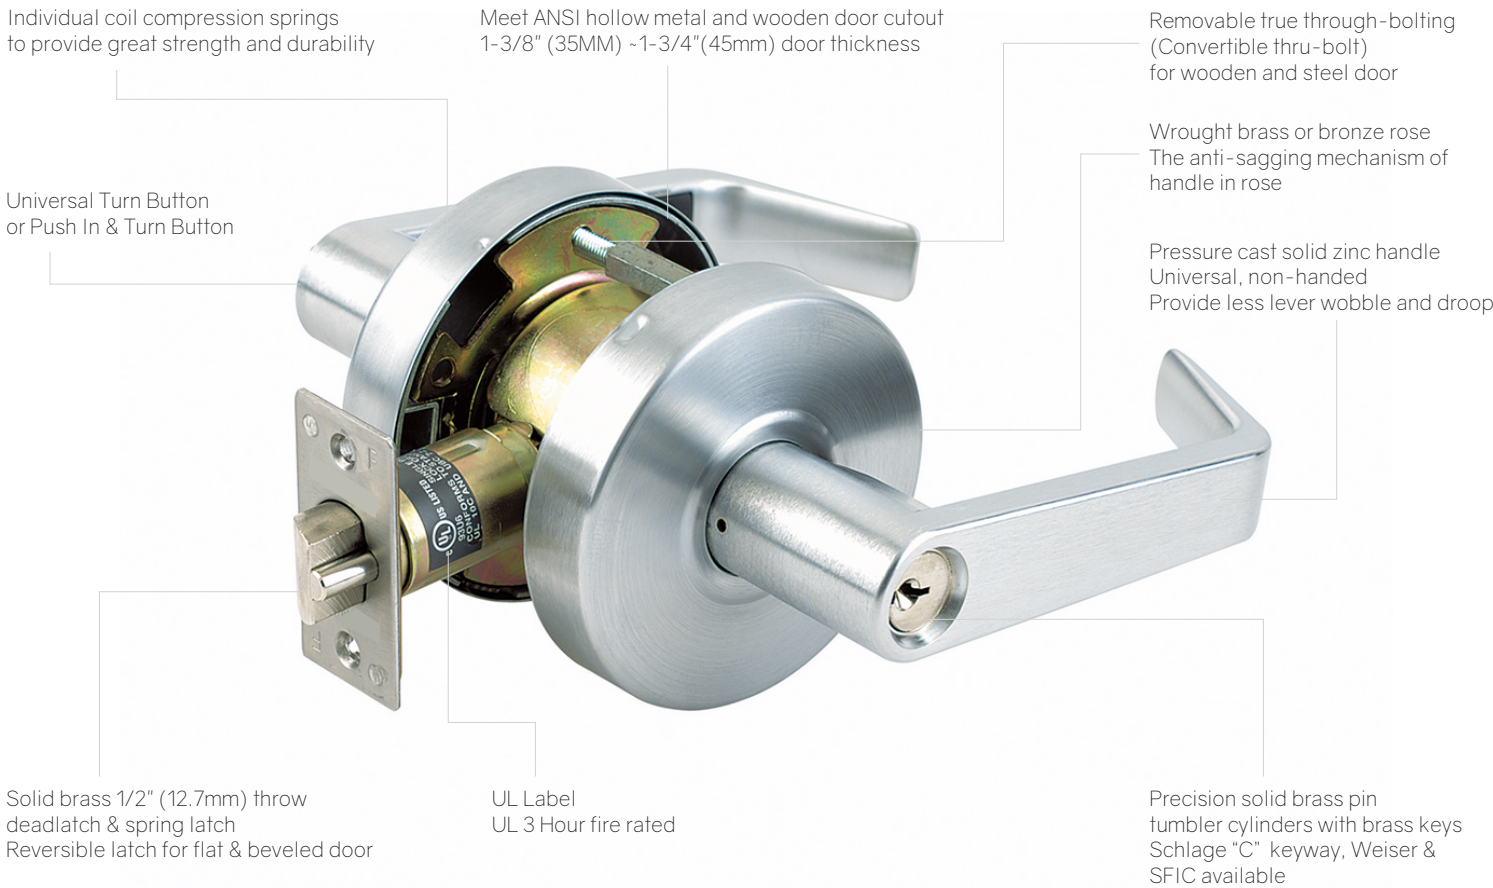

How to Order

KROM-22-L-F-10-C26D

Finish

Function


Rose Design

Lever Design

Model

Krome Line

Door Preparation



SFIC


Small Format Interchangeable Core available

22 SERIES


MEDIUM-DUTY CYLINDRICAL LEVER LOCK

Lever Designs:


L Lever

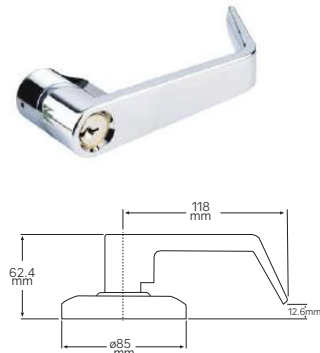

R Lever

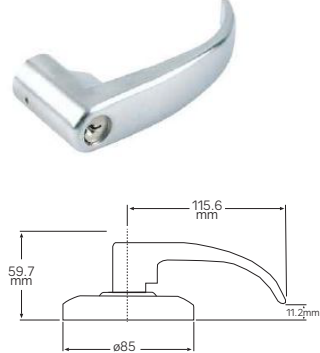


S Lever

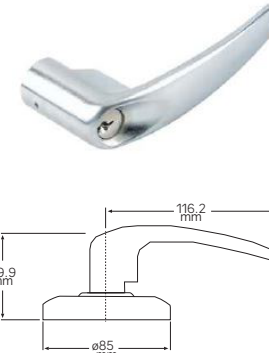

Rose Design:

F Rose (Flat)



Functions:

- 10 - Passage
- 40 - Privacy
- 53 - Entry
- 70 - Classroom
- 72 - Classroom (Double)
- 80 - Storeroom
- 82 - Storeroom (Double)

Finishes:

- C26D
- C3

Advantages

Certifications

- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 2 strength, operational and 400,000 cycles requirements
- **UL/cUL:** all locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
- **Positive pressure:** Meets UL10C
- **ADA compliant:** Designed to meet the Americans with Disabilities Act. requirement for barrier free accessibility

Flexibility

- Removable convertible post
- Free wheeling mechanism available
- Various lever and rose designs
- Large selection of functions and finishes

Specifications

Door Thickness

1-3/8" (35mm) to 1-3/4" (45mm)

Backset

2-3/4" (70mm) standard, 2-3/8" (60mm) optional, 3-3/4" (95mm) and 5" (127mm) available

Latch Front

1-1/8" (29mm) x 2-1/4" (57mm) standard, 1" (25mm) x 2-1/4" (57mm) optional, square or round corner, beveled, drive-in latch available

Latch Bolt

Solid Brass 1/2" (12.7mm) throw

Strike

ANSI (ASA) curved lip strike standard.

Cylinder & Keys

Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available.

Warranty

Ten-year Limited Mechanical Warranty

22 SERIES

MEDIUM-DUTY CYLINDRICAL KNOB LOCK

22 Knob Lockset, Grade 2



Universal Turn Button
or Push In & Turn Button

Meet ANSI hollow metal and wooden door cutout
1-3/8" (35MM) -1-3/4"(45mm) door thickness
up to 2-1/4" (57mm) optional

Wrought brass or bronze rose
Ø 70 Spring-clip-on rose standard,
Ø 65, spin-pn rose available

Wrought brass, bronze or stainless
steel Ø 54 knob
Universal, non-handed

Solid brass 1/2" (12.7mm) throw
deadlatch & spring latch
Reversible latch for flat & beveled door

UL Label
UL 3 Hour fire rated

Precision solid brass pin
tumbler cylinders with brass keys
Schlage "C" keyway, Weiser &
SFIC available

How to Order

KROM-22-B-F-10-C32D

Finish

Function


Rose Design

Knob Design

Model

Krome Line

Door Preparation

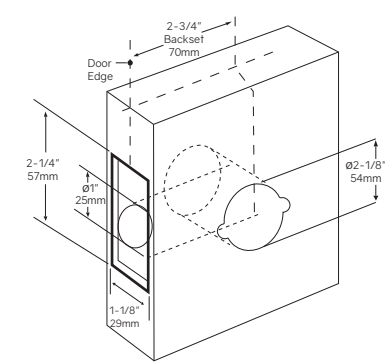

SFIC


Small Format Interchangeable Core available

22 SERIES

MEDIUM-DUTY CYLINDRICAL KNOB LOCK


Knob Design:

B Knob

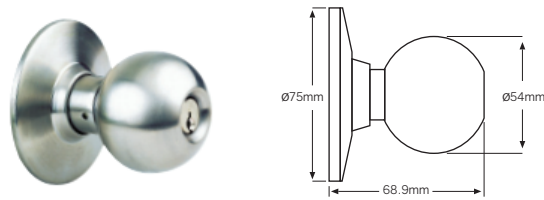


Rose Designs:

F Rose (Flat)



R Rose (Round)



Functions:

- 10 - Passage
- 40 - Privacy
- 53 - Entry
- 70 - Classroom
- 72 - Classroom (Double)
- 80 - Storeroom
- 82 - Storeroom (Double)

Finishes:

- C32D
- C3

Advantages

Certifications

- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 400,000 cycles requirements
- **UL/cUL:** All locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
- **Positive pressure:** Meets UL10C

Flexibility

- 2 types of rose designs
- Up to 2-1/4" (57mm) door thickness optional
- Large selection of function & finishes available

Specifications

Door Thickness

1-3/8" (35mm) to 1-3/4" (45mm)

Backset

2-3/4" (70mm) standard, 2-3/8" (60mm) optional, 3-3/4" (95mm) and 5" (127mm) available

Latch Front

1-1/8" (29mm) x 2-1/4" (57mm) standard, 1" (25mm) x 2-1/4" (57mm) optional, Square or Round corner, beveled, drive-in latch available

Latch Bolt

Solid Brass 1/2" (12.7mm) throw

Strike

ANSI (ASA) curved lip strike standard. SS or Steel material.
K203-G2, K203-G3 & Full-lip strike available

Cylinder & Keys

Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available.

Warranty

Ten-year Limited Mechanical Warranty

25 Deadbolt Lockset, Grade 2



Meet ANSI hollow metal and wooden door cutout 1-3/8" (35MM) -2"(52mm) door thickness Metal Shield

Solid brass, bronze or Stainless steel trim ring

Sturdy, all steel latch case and mechanism

Solid Brass 1" (25.4mm) throw with hardened steel pin inserted
Reversible latch for flat & beveled door

UL Label
UL 3 Hour fire rated

Precision solid brass pin tumbler cylinders cap-nut way with brass keys
Schlage "C" keyway, Weiser & SFIC available

How to Order

KROM-25DB-51-C26D


Finish

Function

Model

Krome Line

Door Preparation

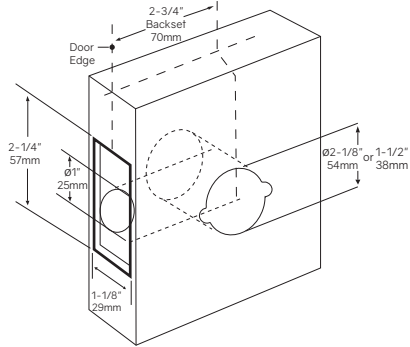


SFIC

Small Format Interchangeable Core available

Function:

51 - Single

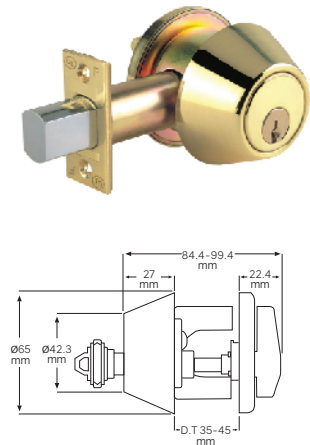

Finishes:
C26D
C3


Advantages

- Certifications**
- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 2 strength, operational and 400,000 cycles requirements
 - **UL/cUL:** All locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
 - **Positive pressure:** Meets UL10C

Specifications

- Door Thickness**
1-3/8" (35mm) to 1-3/4" (45mm)
- Backset**
2-3/4" (70mm) standard, 2-3/8" (60mm) optional
- Latch Front**
1-1/8" (29mm) x 2-1/4" (57mm) Square or Round corner, beveled
- Latch Bolt**
Solid Brass 1" (25.4 mm) throw with hardened steel pin inserted

60 - Double

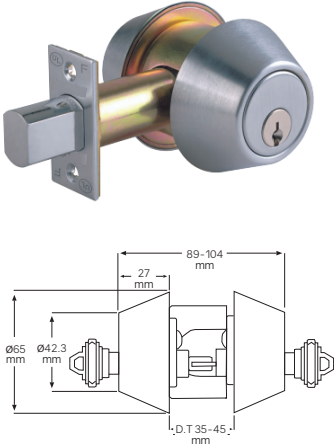


- Strike**
Deadbolt strike standard.
- Cylinder & Keys**
Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available.
- Warranty**
Ten-year Limited Mechanical Warranty

RDL SERIES


REPLACEMENT DEADLATCH

Latches:

Square Corner Deadbolt Latch



Deadlatch




Function:
53 - Entry

Finish:
C32D

Backset:
2-3/8"

Drive-in Latch and Deadbolt Latch (Drive-in) available.

How to Order

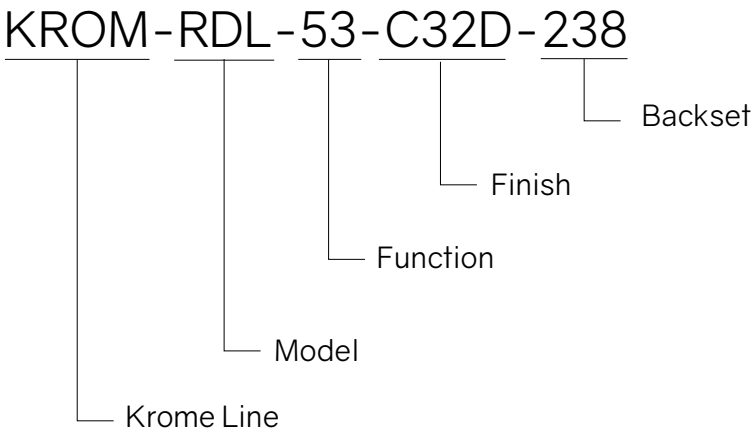


RSL SERIES

REPLACEMENT SPRINGLATCH

Latches:

Square Corner Springlatch




Function:
10 - Passage

Finish:
C32D

Backset:
2-3/8"

How to Order

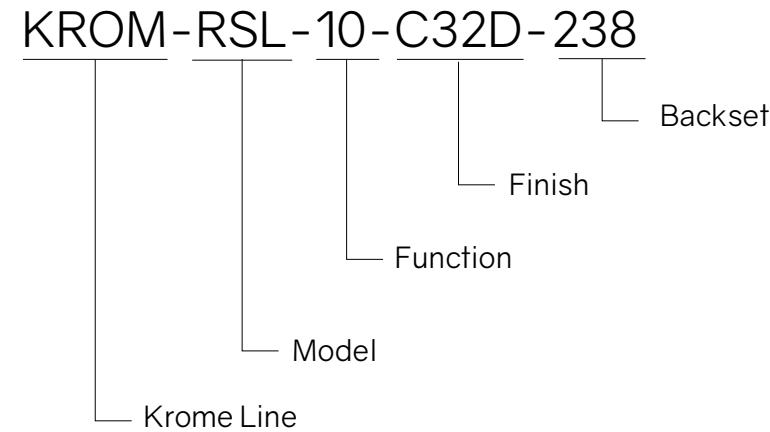

KROME

Door Lock Collection
2017