

KROME

Door Lock Collection

Table of Contents

11 Series	
Heavy Duty Cylindrical Lever Lock	02, 03
Heavy Duty Cylindrical Knob Lock	04, 05
22 Series	
Medium Duty Cylindrical Lever Lock	06, 07
Medium-Duty Cylindrical Knob Lock	08, 09
25 Series	
Deadbolt Lock	10, 11
RDL Series	
Replacement Deadlatch	12
RSL Series	
Replacement Spring Latch	13

11 SERIES

HEAVY-DUTY CYLINDRICAL LEVER LOCK

11 Lever Lockset, Grade 1



Individual coil compression springs to provide great strength and durability

Meet ANSI hollow metal and wooden door cutout 1-5/8" (40MM) - 2" (52mm) door thickness

Removable True through-bolting (Convertible thru-bolt) for wooden and steel door

Wrought brass or bronze rose The Anti-sagging mechanism of handle in rose

Pressure cast Solid Zinc Handle Universal, non-handed

Universal Turn Button or Push In & Turn Button

Stainless Steel 17/32" (13.5mm) throw deadlatch & spring latch Reversible latch for flat & beveled door

UL Label UL 3 Hour fire rated

Precision solid brass pin tumbler cylinders cap-nut way with brass keys Schlage "C" Keyway & SFIC available

How to Order

KROM-11-L-F-40-C26-C

Clutch (optional)

Finish

Function


Rose Design

Lever Design

Model

Krome Line

Door Preparation



SFIC


Small Format Interchangeable Core available

11 SERIES

HEAVY-DUTY CYLINDRICAL LEVER LOCK


Lever Design:

L Lever

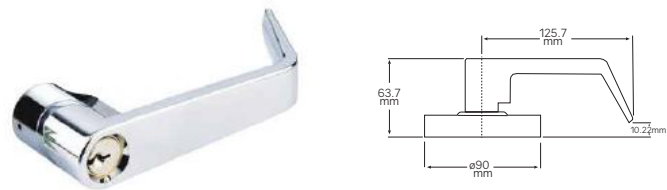

Rose Design:

Flat Rose (F)



Functions:

- 10 - Passage
- 40 - Privacy
- 53 - Entry
- 70 - Classroom
- 72 - Classroom (Double)
- 80 - Storeroom
- 82 - Storeroom (Double)

Finish:

C26D

Finish:

Clutch (C)

Advantages

Certifications

- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 1,000,000 cycles requirements
- **UL/cUL:** all locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
- **Positive pressure:** Meets UL10C
- **ADA compliant:** Designed to meet the American with Disabilities Act. requirement for barrier free accessibility

Flexibility

- Removable convertible post
- Free wheeling mechanism
- Various lever designs available
- Large selection of functions and finishes available

Free wheeling mechanism (clutch)

When the outside lever is locked, it will rotate freely up and down while remaining securely locked.



Specifications

Door Thickness

1-5/8" (40mm) to 2" (52mm)

Backset

2-3/4" (70mm) standard, 2-3/8" (60mm) optional

Latch Front

1-1/8" (29mm) x 2-1/4" (57mm)

Latch Bolt

Stainless Steel 17/32" (13.5mm) throw

Strike

ANSI (ASA) curved lip strike standard.

Cylinder & Keys

Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway and SFIC available.

Warranty

Seven-year Limited Mechanical Warranty

11 SERIES

HEAVY-DUTY CYLINDRICAL KNOB LOCK

11 Knob Lockset, Grade 1



Universal Turn Button
or Push In & Turn Button

Meet ANSI hollow metal and wooden door cutout
1-3/8" (35MM) - 2"(52mm) door thickness
Door range indicator marked on cover

Wrought brass or bronze Ø 70 rose
Spin-on rose type flat design only

Wrought brass, bronze Ø 56 knob

Stainless Steel 17/32" (13.5mm) throw
deadlatch & spring latch
Reversible latch for flat & beveled door

UL Label
UL 3 Hour fire rated

Precision solid brass pin
tumbler cylinders with brass keys
Schlage "C" Keyway & SFIC available

How to Order

KROM-11-B-F-10-C26D

Finish

Function

Rose Design

Knob Design

Model

Krome Line

Door Preparation


SFIC

Small Format Interchangeable Core available


11 SERIES

HEAVY-DUTY CYLINDRICAL KNOB LOCK

Knob Design:
B Knob

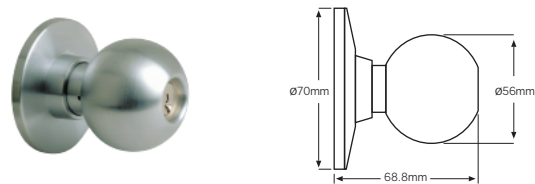

Rose Design:
F Rose (Flat)



- Functions:
- 10 - Passage
 - 40 - Privacy
 - 53 - Entry
 - 70 - Classroom
 - 72 - Classroom (Double)
 - 80 - Storeroom
 - 82 - Storeroom (Double)

Finish:
C26D

Advantages

- Certifications**
- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 1,000,000 cycles requirements
 - **UL/cUL:** All locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
 - **Positive pressure:** Meets UL10C

- Flexibility**
- Large selection of functions and finishes
 - Easy to adjust the door thickness range by indicator

Specifications

Door Thickness
1-3/8" (35mm) to 2" (52mm)

Strike
ANSI (ASA) curved lip strike standard.

Backset
2-3/4" (70mm) standard, 2-3/8" (60mm) optional

Cylinder & Keys
Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, and SFIC available.

Latch Front
1-1/8" (29mm) x 2-1/4" (57mm)


Latch Bolt
Stainless Steel 17/32" (13.5mm) throw

Warranty
Seven-year Limited Mechanical Warranty

22 SERIES

MEDIUM-DUTY CYLINDRICAL LEVER LOCK

22 Lever Lockset, Grade 2

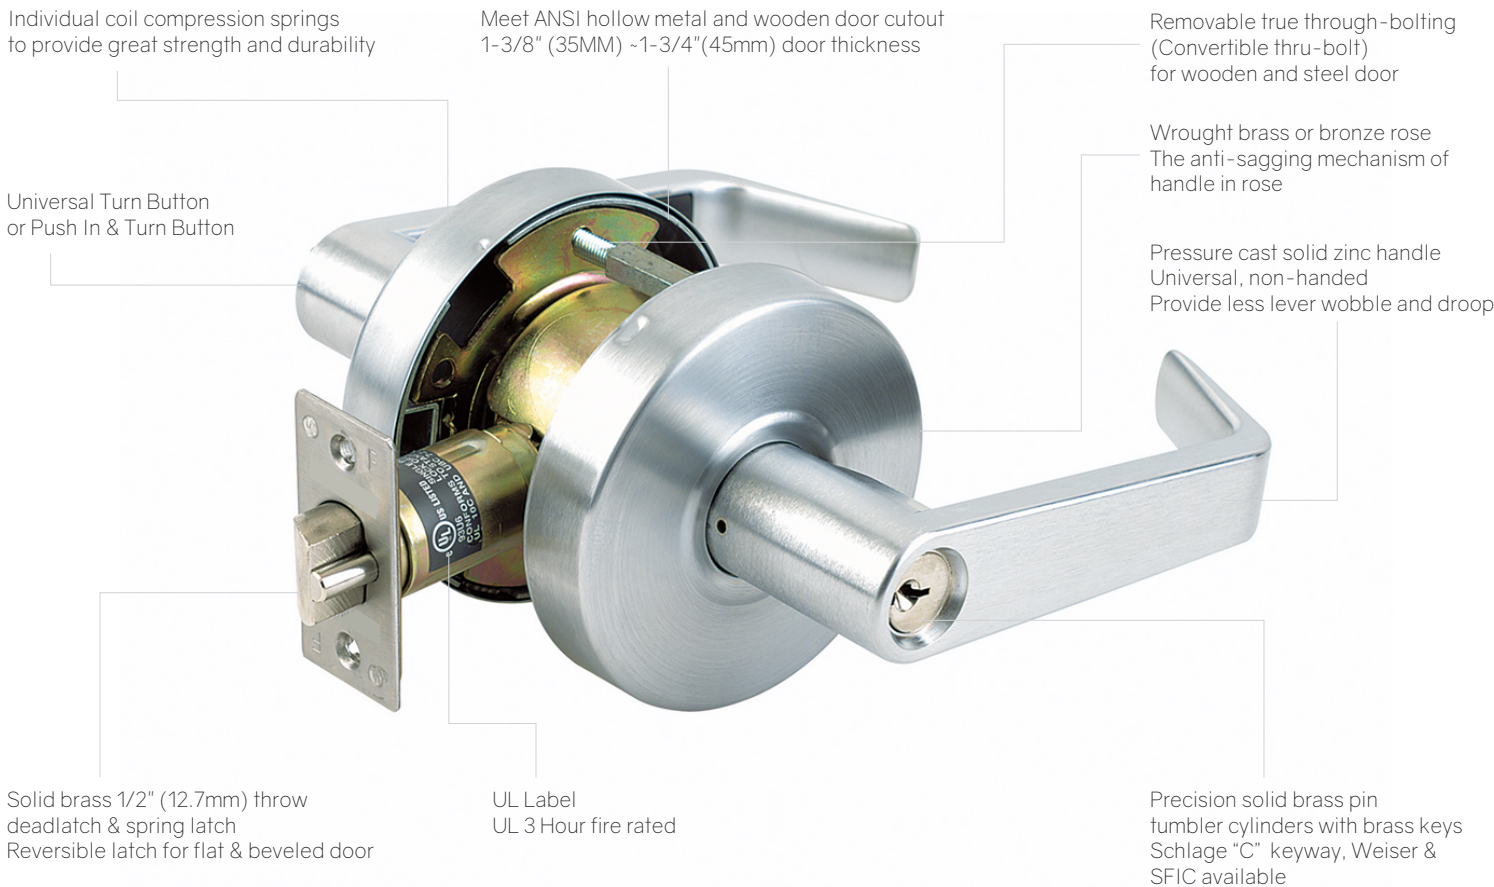

How to Order

KROM-22-L-F-10-C26D

Finish

Function


Rose Design

Lever Design

Model

Krome Line

Door Preparation



SFIC


Small Format Interchangeable Core available

22 SERIES


MEDIUM-DUTY CYLINDRICAL LEVER LOCK

Lever Designs:


L Lever

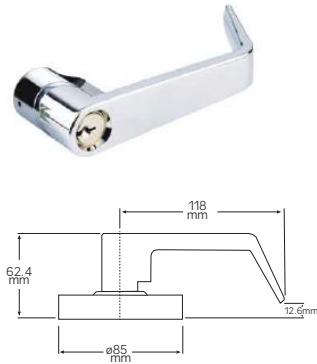

R Lever

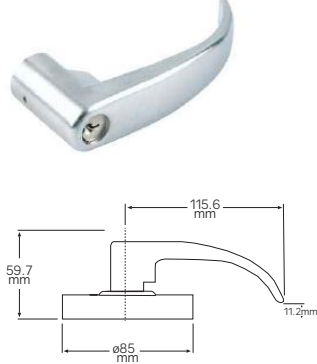


S Lever

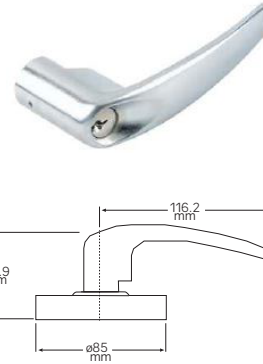

Rose Design:

F Rose (Flat)



Functions:

- 10 - Passage
- 40 - Privacy
- 53 - Entry
- 70 - Classroom
- 72 - Classroom (Double)
- 80 - Storeroom
- 82 - Storeroom (Double)

Finishes:

- C26D
- C3

Advantages

Certifications

- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 2 strength, operational and 400,000 cycles requirements
- **UL/cUL:** all locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
- **Positive pressure:** Meets UL10C
- **ADA compliant:** Designed to meet the Americans with Disabilities Act. requirement for barrier free accessibility

Flexibility

- Removable convertible post
- Free wheeling mechanism available
- Various lever and rose designs
- Large selection of functions and finishes

Specifications

Door Thickness

1-3/8" (35mm) to 1-3/4" (45mm)

Backset

2-3/4" (70mm) standard, 2-3/8" (60mm) optional, 3-3/4" (95mm) and 5" (127mm) available

Latch Front

1-1/8" (29mm) x 2-1/4" (57mm) standard, 1" (25mm) x 2-1/4" (57mm) optional, square or round corner, beveled, drive-in latch available

Latch Bolt

Solid Brass 1/2" (12.7mm) throw

Strike

ANSI (ASA) curved lip strike standard.

Cylinder & Keys

Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available.

Warranty

Five-year Limited Mechanical Warranty

22 SERIES

MEDIUM-DUTY CYLINDRICAL KNOB LOCK

22 Knob Lockset, Grade 2



Universal Turn Button
or Push In & Turn Button

Meet ANSI hollow metal and wooden door cutout
1-3/8" (35MM) - 1-3/4" (45mm) door thickness
up to 2-1/4" (57mm) optional

Wrought brass or bronze rose
Ø 70 Spring-clip-on rose standard,
Ø 65, spin-pn rose available

Wrought brass, bronze or stainless
steel Ø 54 knob
Universal, non-handed

Solid brass 1/2" (12.7mm) throw
deadlatch & spring latch
Reversible latch for flat & beveled door

UL Label
UL 3 Hour fire rated

Precision solid brass pin
tumbler cylinders with brass keys
Schlage "C" keyway, Weiser &
SFIC available

How to Order

KROM-22-B-F-10-C32D

Finish

Function


Rose Design

Knob Design

Model

Krome Line

Door Preparation

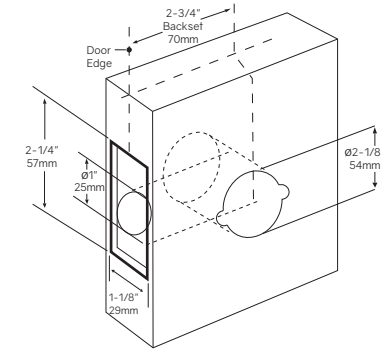


SFIC

Small Format Interchangeable Core available


22 SERIES

MEDIUM-DUTY CYLINDRICAL KNOB LOCK


Knob Design:
B Knob

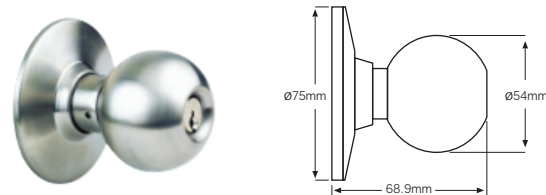

Rose Designs:
F Rose (Flat)



R Rose (Round)

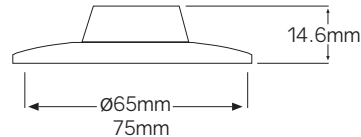

Functions:
10 - Passage
40 - Privacy
53 - Entry
70 - Classroom
72 - Classroom (Double)
80 - Storeroom
82 - Storeroom (Double)

Finishes:
C32D
C3

Advantages

- Certifications**
- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 400,000 cycles requirements
 - **UL/cUL:** All locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
 - **Positive pressure:** Meets UL10C

- Flexibility**
- 2 types of rose designs
 - Up to 2-1/4" (57mm) door thickness optional
 - Large selection of function & finishes available

Specifications

- Door Thickness**
1-3/8" (35mm) to 1-3/4" (45mm)
- Backset**
2-3/4" (70mm) standard, 2-3/8" (60mm) optional, 3-3/4" (95mm) and 5" (127mm) available
- Latch Front**
1-1/8" (29mm) x 2-1/4" (57mm) standard, 1" (25mm) x 2-1/4" (57mm) optional, Square or Round corner, beveled, drive-in latch available
- Latch Bolt**
Solid Brass 1/2" (12.7 mm) throw
- Strike**
ANSI (ASA) curved lip strike standard. SS or Steel material.
K203-G2, K203-G3 & Full-lip strike available
- Cylinder & Keys**
Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available.
- Warranty**
Five-year Limited Mechanical Warranty

25 SERIES

DEADBOLT LOCK

25 Deadbolt Lockset, Grade 2



Meet ANSI hollow metal and wooden door cutout
1-3/8" (35MM) ~2"(52mm) door thickness
Metal Shield

Solid brass, bronze
or Stainless steel trim ring

Sturdy, all steel latch case and mechanism

UL Label
UL 3 Hour fire rated

Precision solid brass pin
tumbler cylinders cap-nut way
with brass keys
Schlage "C" keyway, Weiser
& SFIC available

Solid Brass 1" (25.4mm) throw with
hardened steel pin inserted
Reversible latch for flat & beveled door

How to Order

KROM-25DB-51-C26D


Finish

Function

Model

Krome Line

Door Preparation

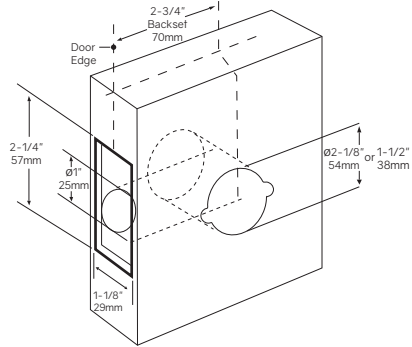

SFIC


Small Format Interchangeable Core available

25 SERIES


DEADBOLT LOCK

Function:

51 - Single

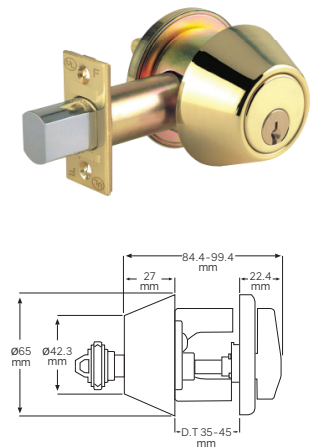

60 - Double

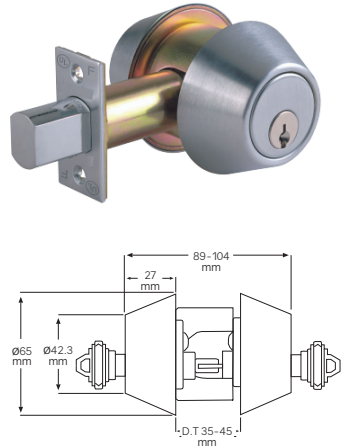

Finishes:

- C26D
- C3
- 10B
- 15

Advantages

- Certifications**
- **ANSI/BHMA:** Meets or exceeds ANSI/BHMA A156.2 Series 4000, Grade 2 strength, operational and 400,000 cycles requirements
 - **UL/cUL:** All locks listed to U.S.A and Canadian safety standards for 3 hour doors, 4" x 8" Letter F and UL symbol on latch front indicate listing
 - **Positive pressure:** Meets UL10C

Specifications

Door Thickness
1-3/8" (35mm) to 1-3/4" (45mm)

Backset
2-3/4" (70mm) standard, 2-3/8" (60mm) optional

Latch Front
1-1/8" (29mm) x 2-1/4" (57mm) Square or Round corner, beveled

Latch Bolt
Solid Brass 1" (25.4 mm) throw with hardened steel pin inserted

Strike
Deadbolt strike standard.

Cylinder & Keys
Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available.


Warranty
Five-year Limited Mechanical Warranty

RDL SERIES


REPLACEMENT DEADLATCH

Latches:

Square Corner Deadbolt Latch



Deadlatch



Function:
53 - Entry


Finish:
C32D

Backset:
2-3/8"

Drive-in Latch and Deadbolt Latch (Drive-in) available.

How to Order

KROM-RDL-53-C32D-238

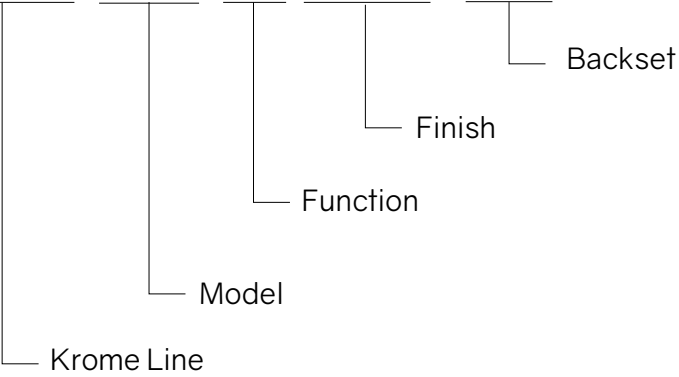


RSL SERIES

REPLACEMENT SPRINGLATCH

Latches:

Square Corner Springlatch




Function:
10 - Passage

Finish:
C32D

Backset:
2-3/8"

How to Order

KROM-RSL-10-C32D-238

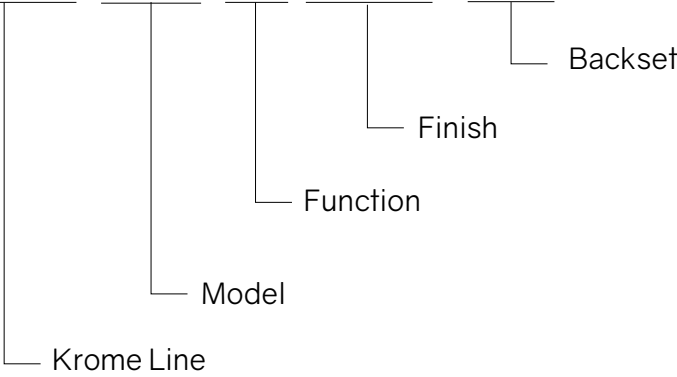

KROME

Door Lock Collection

2018